

船舶用


プロペラ型指示風向風速計

KOSHINVANE**KB-101**

for MARINE


**PROPELLER TYPE INDICATION SYSTEM
WIND DIRECTION AND WIND SPEED ANEMOMETER**

Utility Design Registration (実用新案) No.577683

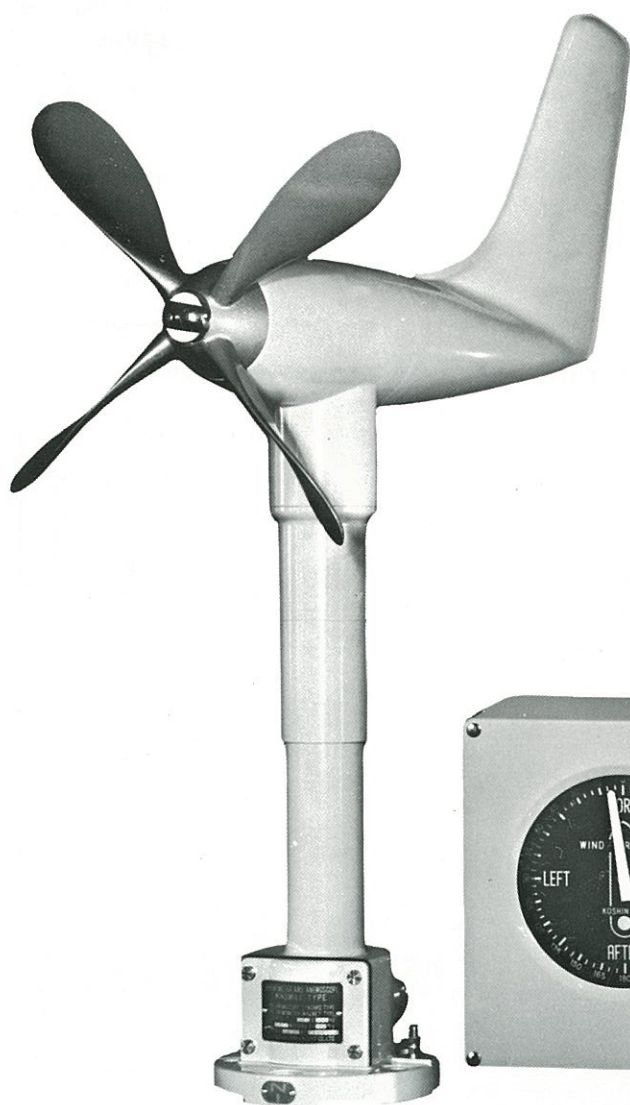

KB-101型コーシンベーンは風向および風速指示器を一体形にまとめたもので、その優秀な性能と取付け取扱いの簡易さで、広く船舶用風向風速計として採用され好評を博しています。

Model KB-101 KOSHINVANE is an instrument in which a wind direction indicator and a wind speed indicator are combined in one unit. Its installation and operations are easy and performances are excellent. Model KB-101 is widely used with a high reputation as a most typical marine anemometer.

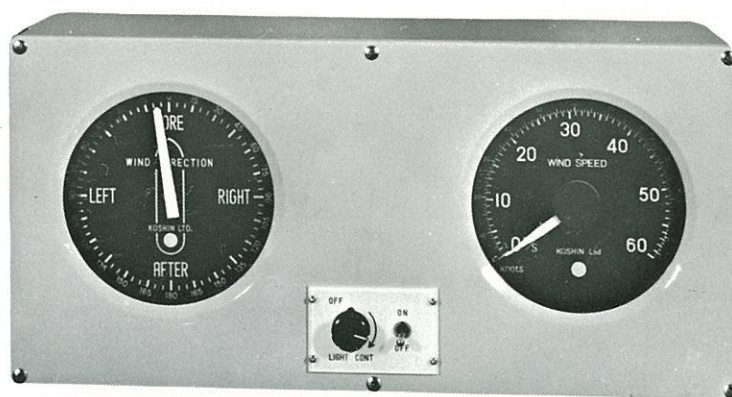**KOSHIN DENKI KOGYO CO., LTD.**



● 構成

- 風向風速発信器…………… 1 台
- 風向風速指示器…………… 1 台
- 真風向風速計算尺…………… 1 枚
- 予備品および付属品…………… 1 式

● 仕様

風向風速発信器

- 型式…プロペラ型発電式
- 風速発信部…交流発電機式
- 風向発信部…交流シンクロ式
- 起動風向風速…2m/s以下
- 耐風速…90m/s
- 塗装色…マンセル記号2.5 G 7/2.
- 重量…約12kg

風向風速指示器

- 風速指示部…可動線輪型電圧計
- 風向指示部…交流シンクロ式
- 測定範囲…風速：2～60m/s
風向：全方向360°
- 測定精度…風速：10m/s以下±0.5m/s以内
10m/s以上±5%以内
風向：±5°以内
- 使用電源…A.C.100V 50/60Hz
- 照明…ランプ照明(標準)
EL板(特別仕様)
- 塗装色…マンセル記号2.5 G 7/2.
- 重量…約14kg

● Compositions

- 1 Wind direction and wind speed transmitter.
- 1 Wind direction and wind speed indicator.
- 1 True wind direction and wind speed computing scale.
- 1 Set of spare parts and accessories.

● Specifications

Wind direction and wind speed transmitter

- Type: Windmill (propeller) type, generating system
- Wind speed transmitter: A.C. generator system
- Wind direction transmitter: A.C. synchro system
- Minimum wind speed for starting operations: Below 2m/s
- Maximum resistible wind speed: 90 m/s
- Painting: Munsell Mark 2.5 G 7/2.
- Weight: About 12kg

Wind direction and wind speed indicator

- Wind speed indicator: Movable coil type voltmeter
- Wind direction indicator: A.C. synchro system
- Measuring ranges: Wind speed: 2 to 60m/s
Wind direction: All azimuths, 360°

Measuring accuracies:

- Wind speed: Within ±0.5m/s at a wind speed below 10m/s, or within ±5% at a wind speed exceeding 10m/s.
- Wind direction: Within ±5°

Power source: A.C. 100 V 50/60 Hz


Method of Illumination:

- Illumination by lamp. (Standard)
- Illumination by E.L. Plate. (Optional)

Painting: Munsell Mark 2.5 G 7/2.

Weight: About 14kg

● 外形寸法図 ● External Dimension

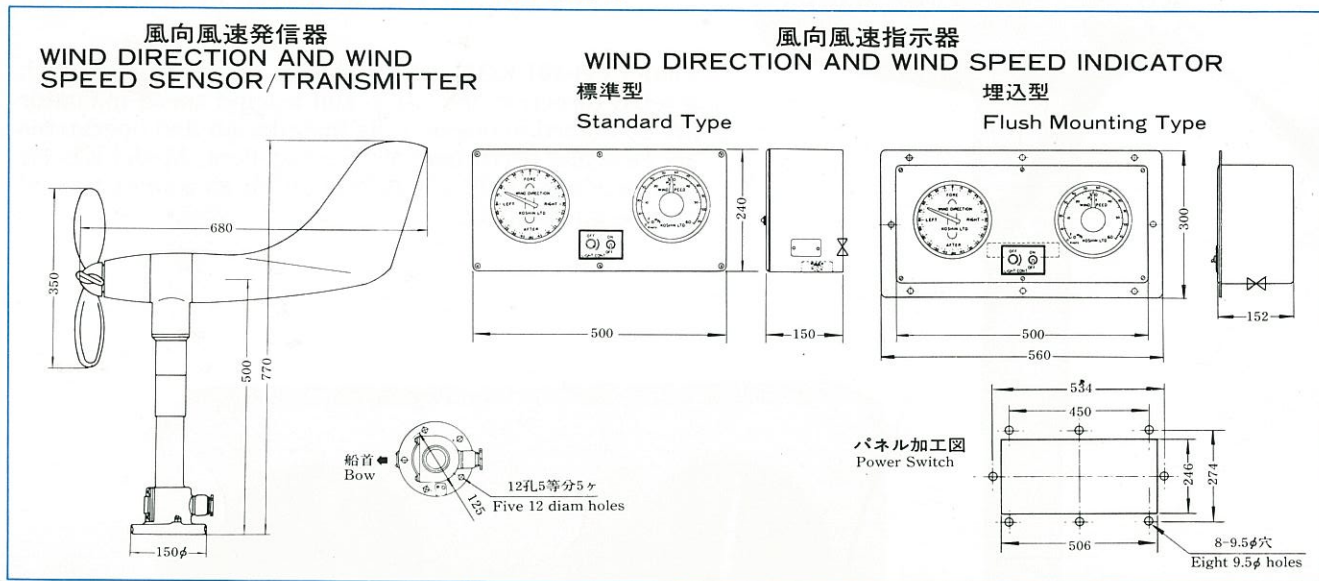

KOSHIN DENKI KOGYO CO., LTD.

HEAD OFFICE · METEOROLOGICAL DIVISION

URL : <http://www.koshindenki.com>

1-20-19, Jiyugaoka, Meguro-ku, Tokyo.152-0035

TEL : +81(0)3-3717-0101 FAX : +81(0)3-3718-0101

SENDAI FACTORY

51-1, Sakaino Aza Hayama, Akiu-Cho, Taihaku-ku, Sendai-City. 982-0242

TEL : +81(0)22-397-2121 FAX : +81(0)22-397-2323 e-mail : sendaif@koshindenki.com



JQA-2497
JQA-EM3212
SENDAI
FACTORY

*The specifications in this catalog may be changed without prior notice to incorporate improvements.