



This three-cup anemometer is made of polycarbonate resin. It's very solid, small and light.

Features

- Tough body made of polycarbonate
- Survival wind speed 90m/s

Specifications

Item	Specifications
Detection system	3-cup, generator type
Measurement range	2 to 70m/s
Accuracy	Within 10m/s or less $\pm 0.5\text{m/s}$, Within 10m/s or more $\pm 5\%$
Start wind speed	2m/s or less
Wind speed resistance	90m/s or more
Cable	Approx. 1km with CVVS 1.25mm ²
Weight	Approx. 550g
Outer dimensions	168(W)x208(H) mm
Environmental condition	-20°C ~ +50°C General environment

Application




Type-C Wind Speed Indicator




Item	Specifications
Sampling period	0.25sec
Display element	7-segment LED
Display	Numerical display from 0.0 to 99.9 Moment/average value switchable
Average time	Momentary value or 10-minute
Data output	0-1Vdc and 0-10mVdc (at 0-60m/s)
Power source	AC100V (standad)
Environmental condition	-10°C ~ +40°C General environment

Type-A Analog Indicator (0-60m/s)

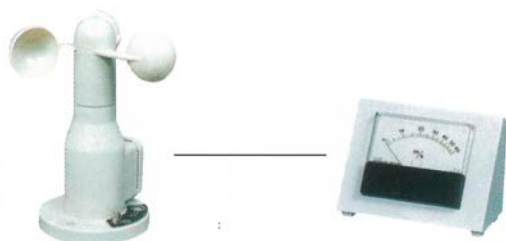


Type-B Data Output

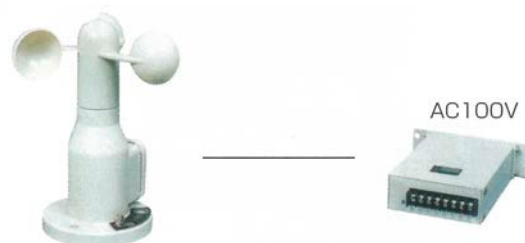

0-60m/s / 0-1Vdc and 0-10mVdc

Dimensions

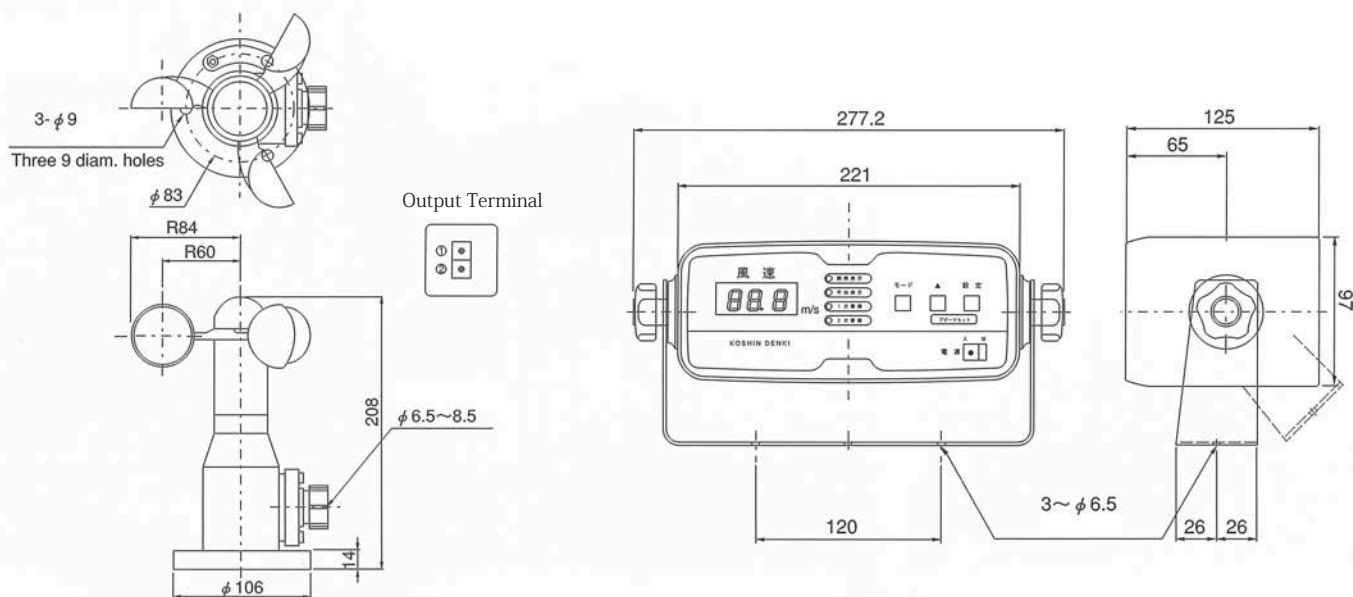

*The specifications in this catalog may be changed without prior notice to incorporate improvements.



KOSHIN DENKI KOGYO CO., LTD.

Head Quarters, Meteorological Instruments Division

URL: <http://www.koshindenki.com>

1-20-19 Jiyugaoka, Meguro-ku, Tokyo 152-0035

TEL: +81-3-3717-0101 FAX: +81-3-3718-0101

Sendai Factory

51-1 Sakaino Aza Hayama, Akiu-Cho, Taihaku-ku, Sendai-City 982-0242

TEL: +81-22-397-2121 FAX: +81-22-397-2323

